

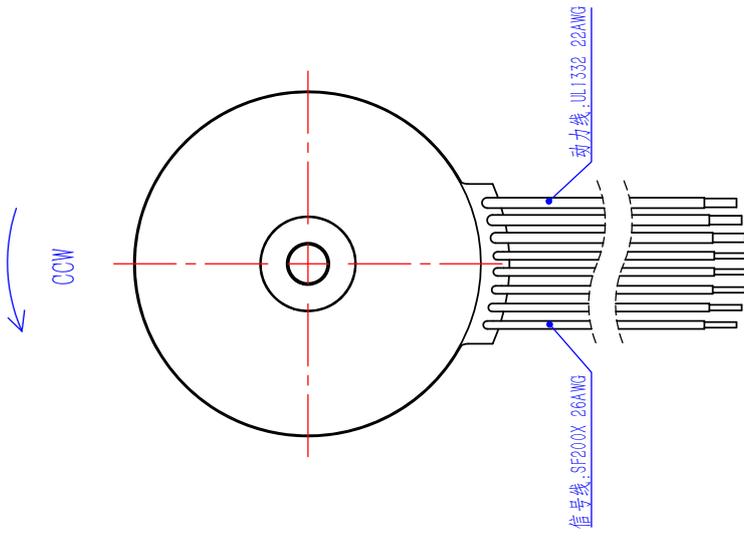
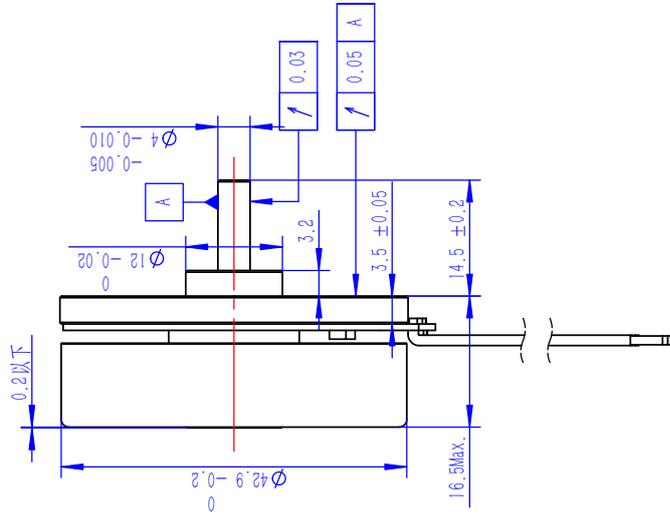
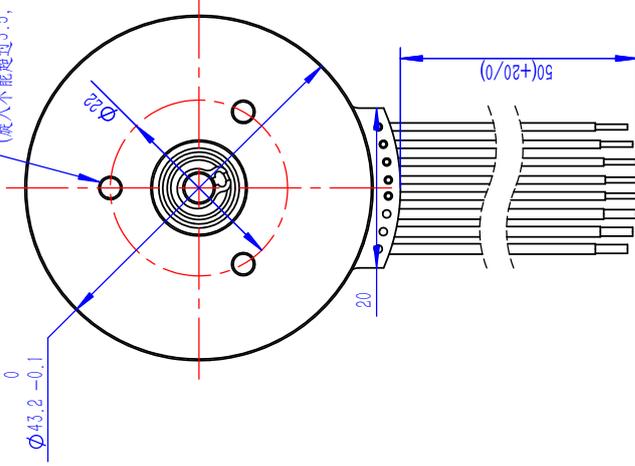


3-M3深3.0
 (深入不能超过3.5, 否则损坏电机)
 $\phi 43.2 - 0.1$
 $\phi 0.2$ A

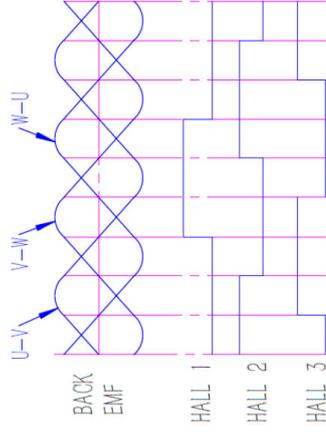

MOTOR SPECIFICATION	
No. of Poles	16
Rated Voltage	VDC
Current - Rated / Peak	1.84/6.14
Resistance Line to Line ($\Omega @ 20^\circ\text{C}$)	0.91
Inductance Line to Line (mH@1kHz)	0.49
Torque - Rated / Peak	mNm 55/165
Torque Constant	Nm/A _{rms} 0.03
Rated Power	W 17
Speed - No Load / Rated	RPM 4243/2940
Rotor Inertia	kg mm ² 10.88
Back EMF	(V /krpm) 1.9

连接器壳体: HC-PHB-2*4Y
 连接器针: HC-PHB-T



电机相序定义: 转子壳一侧入视转子逆时针CCW方向旋转

WWW.YANLANMC.COM/WWW.YANLAN.NET

DC SERVO MOTOR 直流伺服电机

C					
B					
A					
版本	初版/First Edition	设计	日期	页	Sheet
Edition	变更内容	Designed	DATE	Revisions	Sheet

型号	EC45MS-A330AH3	材料	
Model		Material	
批准	J. Song	公差	±0.2 No.
Approved		Tolerance	
审核	CB.Y	比例	1:1
Checked		Scale	
制图	QC.Y	比例	1:1
Drawn		Scale	
		日期	24.12.09
		日期	24.12.09
		日期	24.12.09

Yanlanmc®
 For smarter equip