


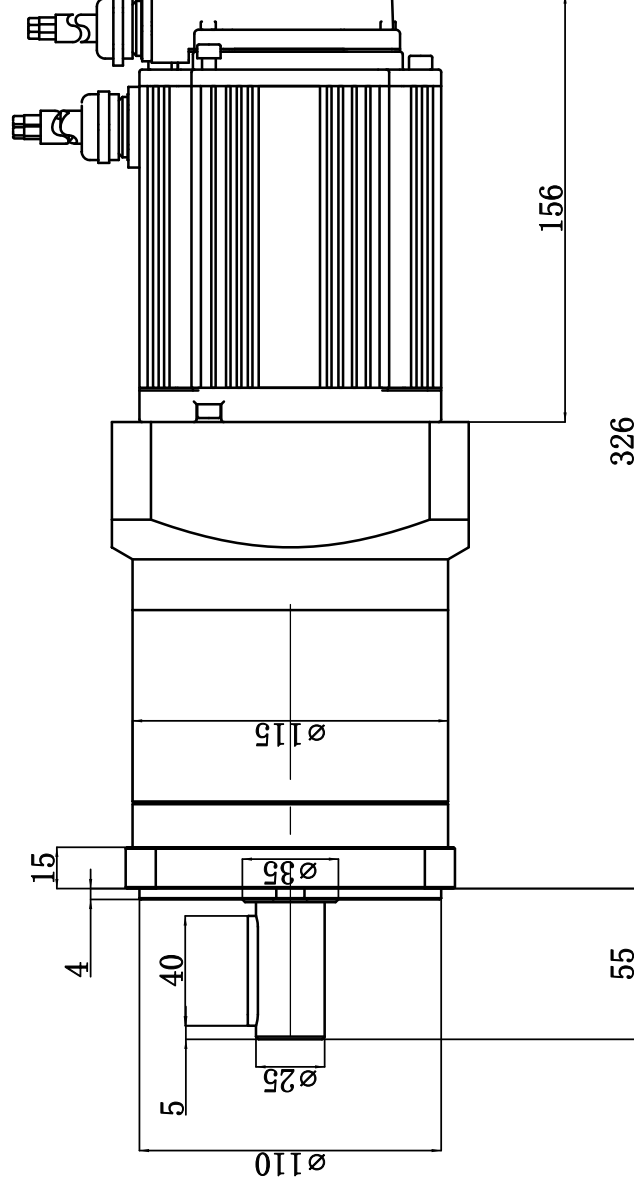


动力插座/Power Line Socket

电动机规格书/Motor Specification

电机极数/Poles	5
电压/电压	48
额定电流/Rated Current	32 A
额定转矩/Rated Torque	6 Nm
电机转速/Rated Speed	2000 rpm
峰值电流/Peak Current	65 A
峰值转矩/Peak Torque	12 Nm
电机额定功率/Rated Power	1250 W
减速齿轮比/Gear Ratio	40
使用温度范围/Operation Ambient Temperature	-20-85 °C
贮存温度范围/Storage Ambient Temperature	-25-85 °C
减速箱额定扭矩/gearbox Rated Torque	200Nm
减速箱峰值扭矩/gearbox Peak Torque	TBD
最终输出转速/Speed	50 rpm
最终输出扭矩/gearbox Output Torque	200Nm

信号定义/Signal definition



插座编号 Socket Numbers	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
颜色 colour		红	黑	蓝	绿	黄	蓝黑	绿黑	黄黑	灰	白				
信号引线 Signal leads	PE	5V	0V	A+	B+	Z+	A-	B-	Z-	U+	V+	W+			

A	初版/First Edition
版本 Edition	变更内容 Revisions

DC Servo motor 直流減速伺服电机

型号 Model	EC110TM48201250-GL40				
批准 Approved	J. Song	25. 06. 29	材质 Material		
审核 Checked	CB. Y	25. 06. 29	公差 Tolerance	± 0. 2	No.
制图 Drawn	QC. Y	25. 06. 29	比例 Scale	1:1	Sheet
				页 Sheet	1/1